



Win-Win Cooperation

# HY Networks (Shanghai) Co., Ltd.


Rm 408, Building A8, Taishang Innovation Park, No.428, Wubao Road,  
Minhang District, Shanghai, People's Republic of China Zip code: 201101  
Tel: 86-21-5671 0796 Fax: 86-21-5671 0715

## Technical Data Sheet

Code No: **UPU6-150A**

### Description:

UHMWPE UD fabric is compounded by UHMWPE fiber with particular processes by our advanced high-tech equipment. It has the characters and superior performances such as high tensile strength, large modulus, soft texture, impact resistance, cutting resistance, high flexibility, acid & alkaline

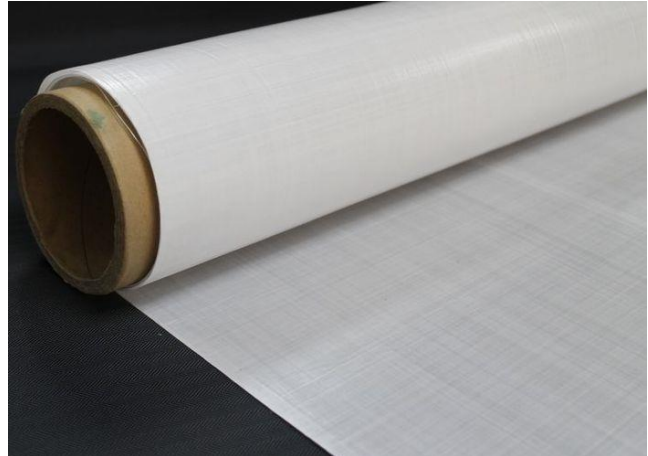

resistance, sunshine proof, soaking proof and moisture proof. Because of the advantages, it is widely used in the applications like bullet proof vests, bullet proof helmets, bullet proof armor plates, stab proof and cutting proof clothes as well as special public anti-explosion facilities and safety protection facilities.

### Technical data:

Unit Weight		150±5g/m <sup>2</sup>	
Yarn		400 Denier	
Direction		0° /90° /0° /90° /0° /90°	
Width		1.2m	
Thickness		0.22 mm	
<b>Protection requirements</b>	<b>Layers</b>	<b>Product unit weight</b>	<b>Standard</b>
China Public Security Level 2	28	4.20kgs/m <sup>2</sup>	GA141-2010
China Public Security Level 3	35	5.25kgs/m <sup>2</sup>	GA141-2010
NIJ IIIA 9mm	24	3.60kgs/m <sup>2</sup>	NIJ0101.04
NIJ IIIA .44	28	4.20kgs/m <sup>2</sup>	NIJ0101.06

Yarn used: 400D/230F

Physical Properties	Unit	Nominal	Result	Test Method
Count	dtex	/	446	GB/T14343
Count CV	%	±4.0	+1.3	
Breaking Tenacity	CN/dtex	≥28.0	29	GB/T19975
Modulus	CN/dtex	≥1000	1024	
Breaking Elongation	%	≤4.0	3.4	